


ST-867A4010

Cavity Band Pass Filter

Specifications

| Serial | Parameters | |
|--------|---------------------------|---|
| 1 | Center Frequency (F0) | 867MHz |
| 2 | Pass Band Frequency | 862~872MHz |
| 3 | Pass Bands Insertion Loss | ≤1.5dB |
| 4 | Pass Bands VSWR | ≤1.4:1 |
| 5 | Stop Band Attenuation | ≥40dB @ F0 ± 30MHz (DC~837MHz、897~1500MHz) |
| 6 | Impedance | 50 ohms |
| 7 | Power Handling | ≤20W |
| 8 | Connectors | N-male |
| 9 | Surface Finish | Black Paint |
| 10 | Watertight Housing | IP67 |
| 11 | Net Weight | TBD |
| 12 | Configuration | As Below (Size Unit: mm) |

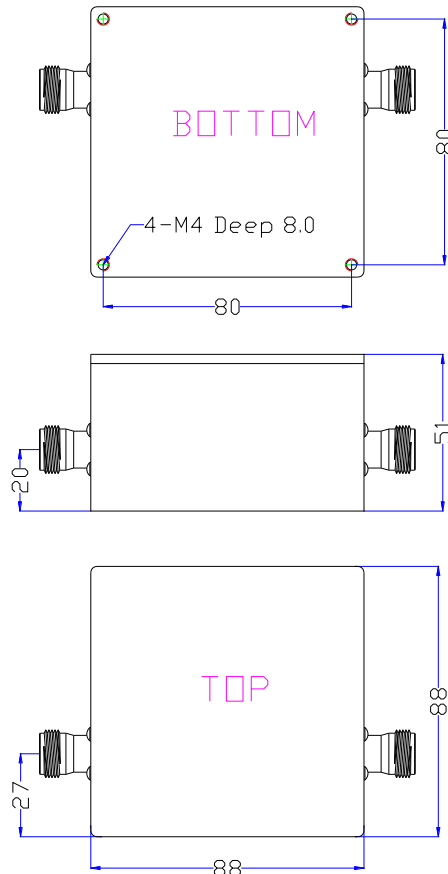

Performance

