


PART No. : TMT-8911

1、 ELECTRICAL SPECIFICATION

NO.	ITEM	SPEC				UNIT
		CH1	CH2	CH3	CH4	
1	Center Frequency	897.5	942.5	1747.5	1842.5	MHz
2	Bandwidth [BW]	880~915	925~960	1710~1785	1805~1880	MHz
3	Insertion Loss	3.5 max	3.5 max	3.5 max	3.5 max	dB
4	Ripple in BW	1.6 max	1.6 max	1.6 max	1.6 max	dB
5	Return Loss	15.0 min	15.0 min	15.0 min	15.0 min	dB
6	Isolation	30min. @925~960	30min. @880~915	45min. @880~915	45min. @880~915	MHz 【dB】
		35min. @1710~1785	35min. @1710~1785	45min. @925~960	45min. @925~960	
		35min. @1805~1880	35min. @1805~1880	30min. @1805~1880	30min. @1710~1785	
7	Power	3.0				W
8	In/Out Impedance	50				Ω

2、 DIMENSIONS

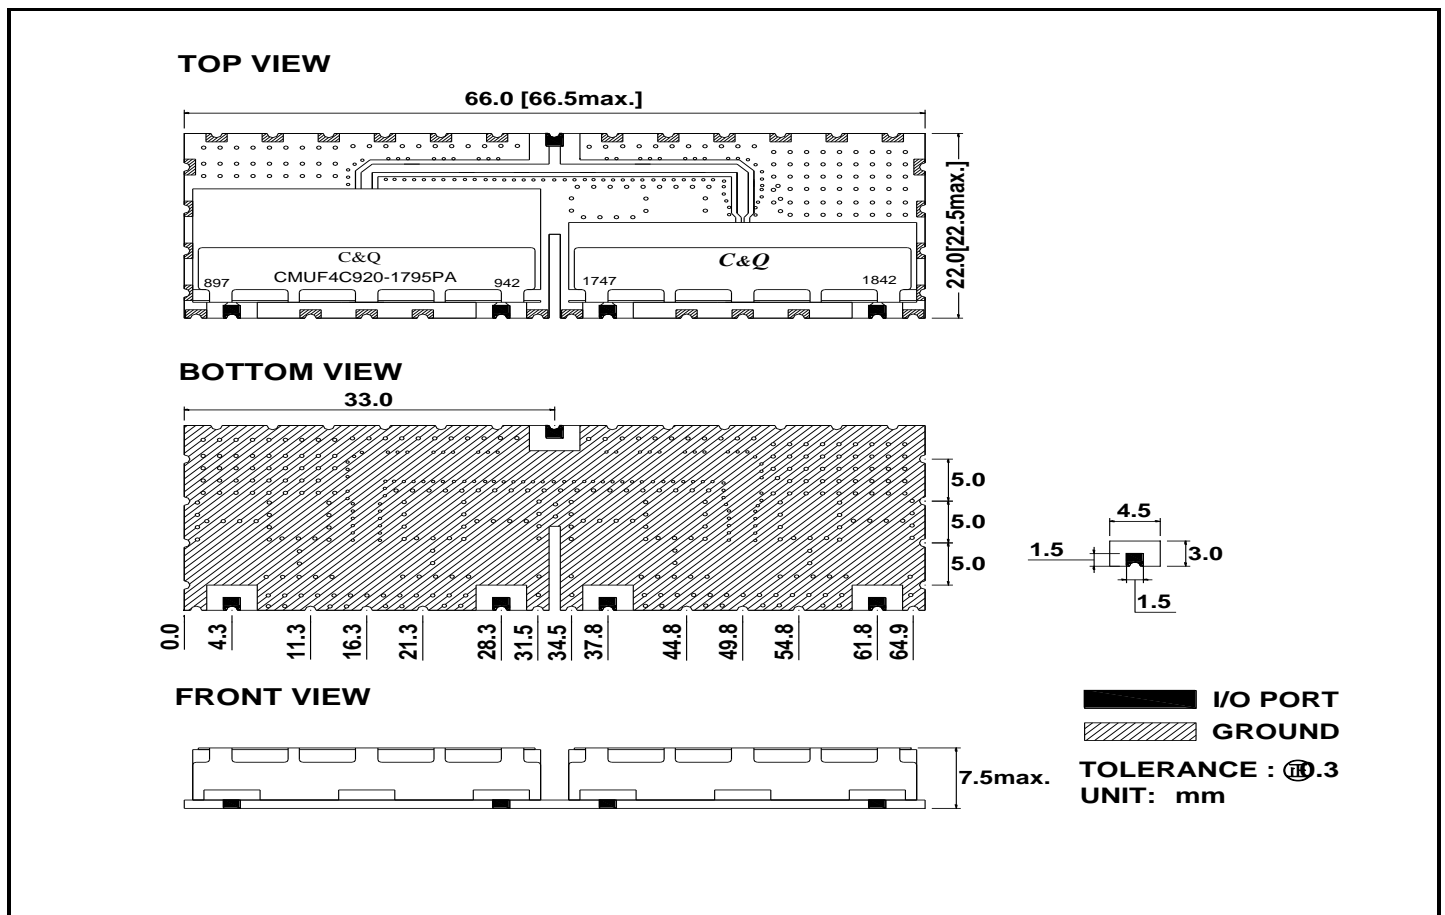

3、ENVIRONMENTAL CHARACTERISTIC

No.	ITEM	DESCRIPTION
1	Operation Temperature Range	-40+85°C
2	Storage Temperature Range	-40+85°C
3	RoHS & WEEE	RoHS