

## 700MHz-2700MHz Directional Coupler


### Preliminary Specifications

Item	Part Number	Frequency	Coupling	I.L	Directivity	VSWR	Power Handling	Impedance	Connector
1	TDC-0.7/2.7-5NA	700-2700 MHz	$5 \pm 0.8\text{dB}$	$\leq 2.0$	$\geq 20\text{dB}$	$\leq 1.25$	200W	50 OHMS	N-Female (Indoor)
2	TDC-0.7/2.7-10NA	700-2700 MHz	$10 \pm 1.0\text{dB}$	$\leq 0.8$	$\geq 20\text{dB}$	$\leq 1.25$	200W	50 OHMS	N-Female (Indoor)

Operational Temperature : -40 to +75°

Surface Color : Silvery White

Dimension Tolerance:  $\pm 0.5\text{mm}$

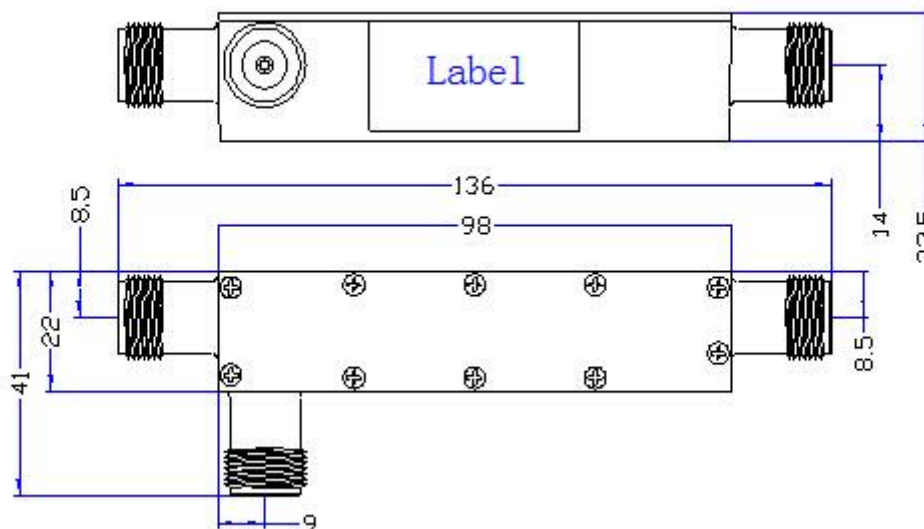

## 700MHz-2700MHz Directional Coupler

Item	Part Number	Frequency	Coupling	I.L	Directivity	VSWR	Power Handling	Impedance	Connector
1	TDC-0.7/2.7-30NA	700-2700 MHz	$30 \pm 1.5\text{dB}$	$\leq 0.2$	$\geq 20\text{dB}$	$\leq 1.25$	200W	50 OHMS	N-Female (Indoor)

Operational Temperature : -40 to +75°C

Surface Color : Silvery White

Dimension Tolerance:  $\pm 0.5\text{mm}$

