


Interdigital Band Pass Filter Specifications

Serial	Parameters	
1	Center Frequency(F0)	5.0GHz
2	Pass Band Frequency	4.0~6.0GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Ripple	≤0.5dB
5	Pass Band VSWR	≤1.5:1
6	Stop Band Attenuation	≥50dB @ 3.0GHz ≥50dB @ 7.0GHz
7	Impedance	50 ohms
8	Power	≤2W
9	Surface Finish	The Original Silver Color
10	Connectors	ø0.5*2mm Needle (SMA-Female Removable)
11	Net weight	TBD
12	Configuration	As Below (Size Unit: mm)



Performance

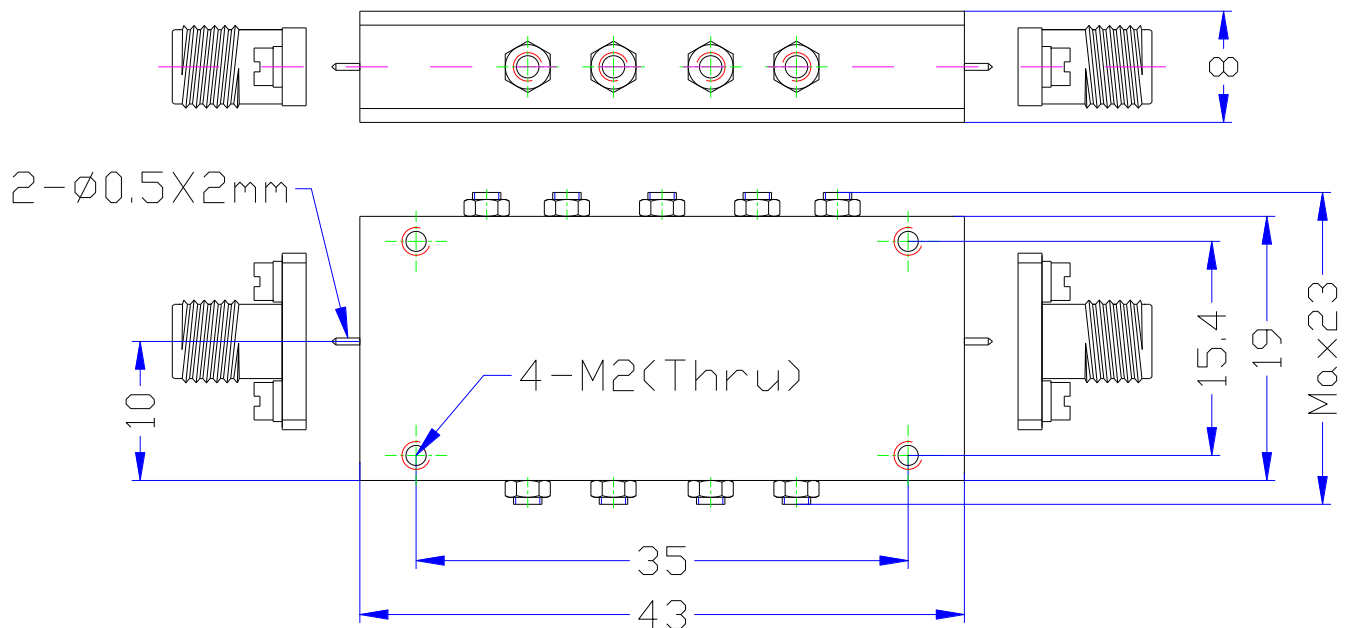