


High Power 100W & 50W

- Impedance: 50 Ohms
- Work Temperature: -25°C to +65°C
- Work Voltage: 28VDC±1V
- RF In/Out Port: SMA-Female Connector
- High Stability & Rugged
- For: GSM, DCS, LTE, Wi-Fi, GPS bands

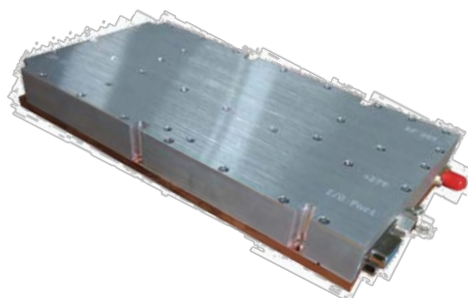

Frequency Range		
851-894MHz, 925-960MHz, 1805-1880MHz 1930-1990MHz, 2110-2170MHz, 2620-2690MHz 2400-2500MHz, 1170-1280MHz, 1550-1620MHz or bespoke		
Output Power	50dBm±0.5dB	47dBm±0.5dB
Gain	>48dB±1.5dB	>45dB±1.5dB
VSWR	≤ 1.5	≤ 1.5
Work Current	<10A	<5.5A
Dimension	210*110*25 mm	180*90*25 mm

- For: ISM, Wi-Fi, LTE, 5G bands

Frequency Range	
5725-5850 MHz or bespoke	
Output Power	46.5dBm±0.5dB
Gain	>47dB±1.5dB
VSWR	≤ 1.8
Work Current	<6A
Dimension	180*90*25 mm

