


ST-WB03-1450S

LC Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency	1450MHz
2	Bandwidth	1900MHz (500 ~ 2400MHz)
3	Insertion Loss	≤1.5dB
4	VSWR	≤1.7:1
5	Attenuation	≥40dB @ DC ~ 400MHz ≥40dB@ 2900 ~ 4000MHz
6	Impedance	50 ohms
7	Group Delay	≤6.0ns
8	Power	1.0W Max.
9	Connectors	SMA-Female
10	Surface Finish	Painted Black
11	Temperature Range	-30°C ~ +70°C
12	Configuration	As Below (Tolerance±0.3mm)

Outline Drawing: (Dimensions Unit: mm, Dimensions Tolerance: ±0.3mm)

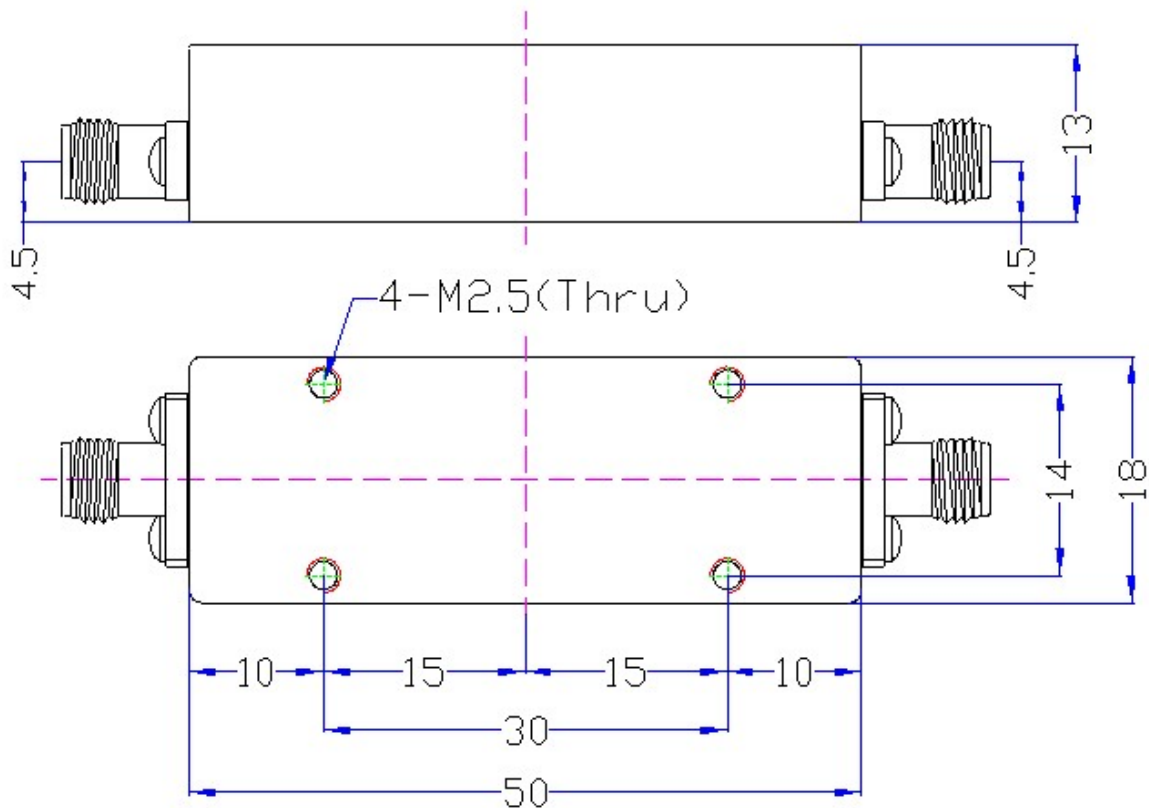

Performance

