


ST-WB05-3000S

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	3000MHz
2	Pass Band Frequency	2125~3875MHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Ripple	≤0.5dB
5	Pass Band VSWR	≤1.5:1
6	Stop Band Attenuation	≥40dB @ 1875MHz ≥40dB @ 4125MHz
7	Impedance	50 ohms
8	Surface Finish	The Original Silver Color
9	Input Power	≤2W
10	Connectors	SMA-Female / SMA-Male
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

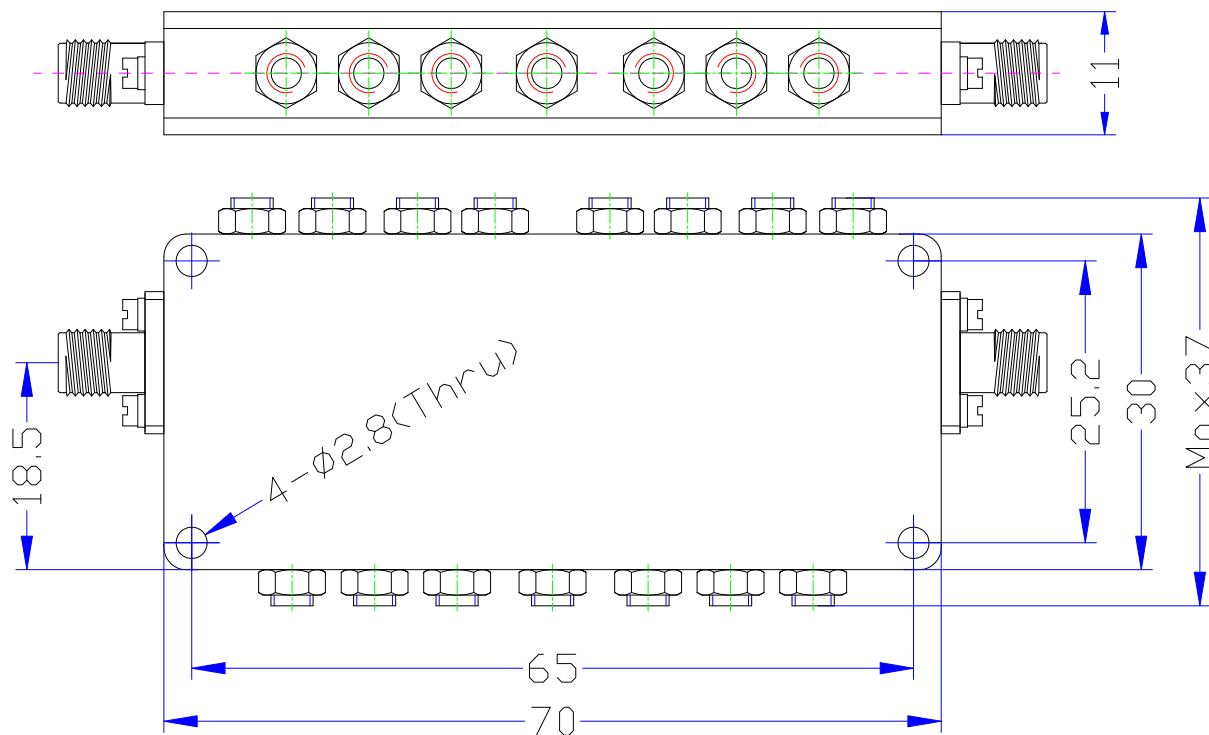

Performance

