


ST-WF12-5800S

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	5800MHz
2	3dB Bandwidth	150MHz (5725~5875MHz)
3	Insertion Loss at F0	≤2.2dB @ 5800MHz
4	VSWR	≤1.3:1 @ 5740~5860MHz
5	Stop Band Rejection	≥10dB @ F0±100MHz (5700MHz、5900MHz) ≥20dB @ F0±125MHz (5675MHz、5925MHz)
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	SMA-Female
9	Temperature Range	-10°C ~ +60°C
10	Surface Finish	The Original Silver Color
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

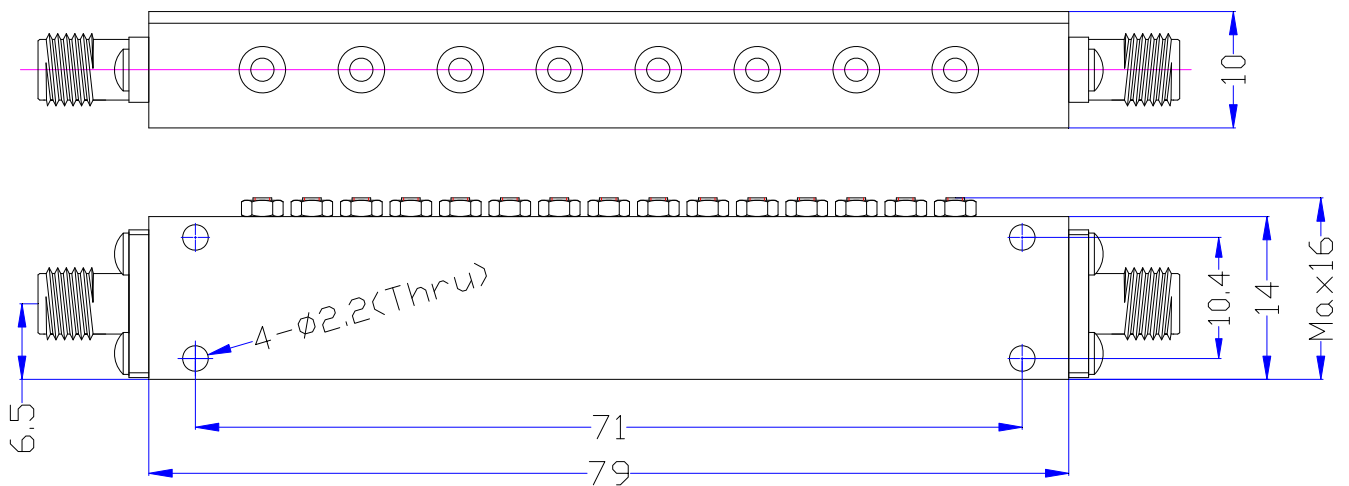

Performance

