




Customized UHF SHF Filter & Miniature Duplexer

VHF UHF Helical Filter Specification Sheet

Issued Dated :

Customer Name		Temwell's Part No.	TD6740B-343M
Approval No. /dated		Customer's Part No.	
Work Instruction No.	20305007C	Date	May/12/2003
<input type="checkbox"/> Buyer Print name		<input type="checkbox"/> Temwell,s print name	
Case Name		Case size :	
Terminator Type			

* Pin Position (Pin Connection) diagram as following
(B) Type

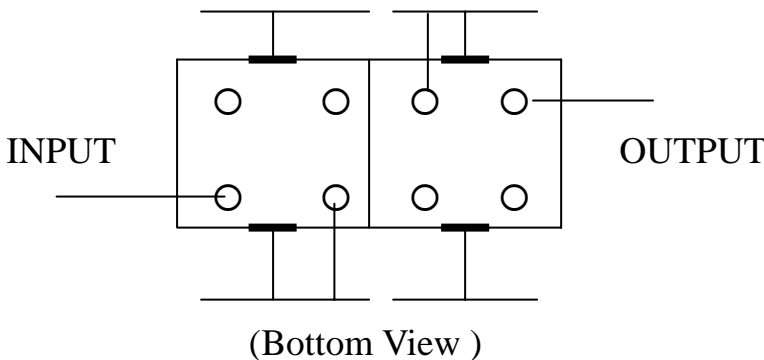

(3) Electric Charasteric

Item	Specify		
Center Freq.(Fo) +/- 0.5 %		343	MHz
Insertion Loss	Max.	3.5	dB
-3 dB Bandwidth	Typ.	5	MHz
Sensitivity (Attenuation)	Fo - 30 MHz	Typ.	38 dBc
	Fo + 30MHz	Typ.	30 dBc
	Fo - () MHz	Typ.	dBc
	Fo +() MHz	Typ.	dBc
Return Loss	Min.	12	dB
Ripple		< 1	dB
Group Delay			ns
Impedance	In / Out : 50 Ω		

4. Temperature Condition:

Operating Temperature	0 ~ +60
Storage Temperature	-20 ~ +70

Approval	Supervisor	Designer	Aperture size
C.Y.CHANG	C.Y.CHANG	C.Y.CHANG	7H2S,4*5.35

TEMWELL CORPORATION

