


ST-WB05-3000S

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	3000MHz
2	Pass Band Frequency	2125~3875MHz
3	Pass Band Insertion Loss	$\leq 1.0\text{dB}$
4	Pass Band Ripple	$\leq 0.5\text{dB}$
5	Pass Band VSWR	$\leq 1.5:1$
6	Stop Band Attenuation	$\geq 40\text{dB @ } 1875\text{MHz}$ $\geq 40\text{dB @ } 4125\text{MHz}$
7	Impedance	50 ohms
8	Surface Finish	The Original Silver Color
9	Input Power	$\leq 2\text{W}$
10	Connectors	SMA-Female / SMA-Male
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

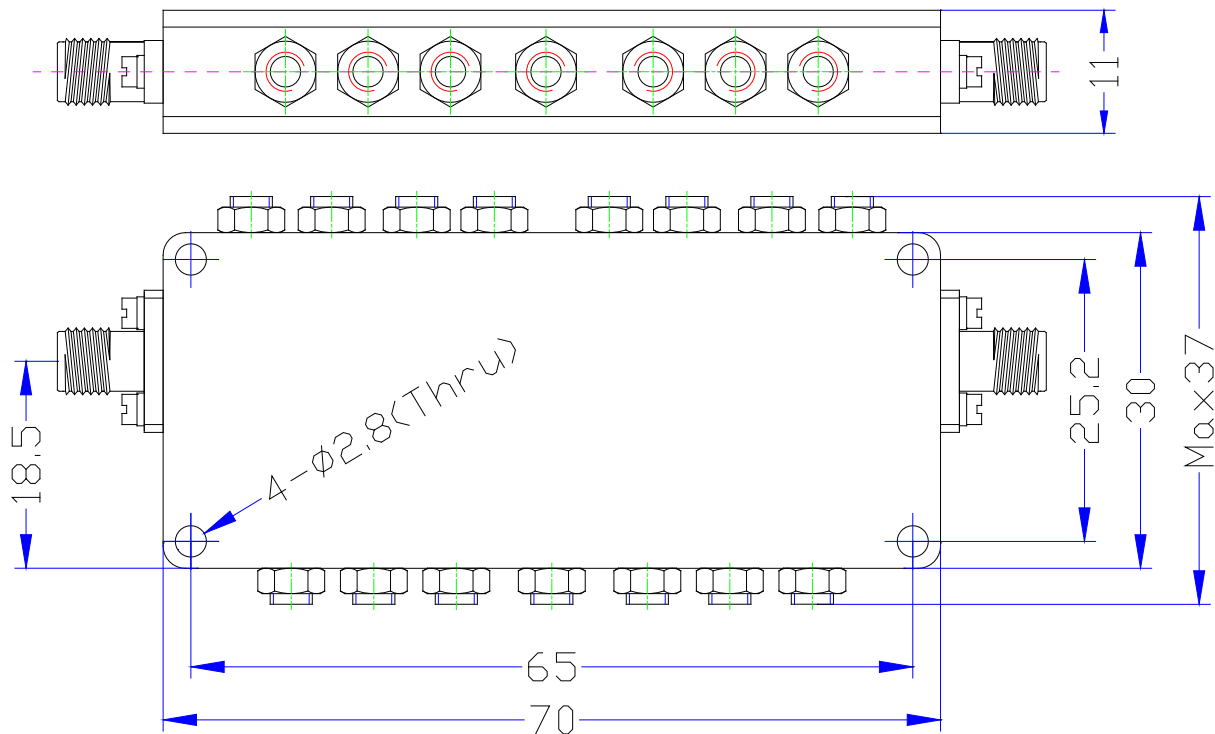

Performance

