


STR-2700-3200M10A

Cavity Band Rejection Filter

Specifications

S/N	Item	Parameters
1	Stop Band	2700 ~ 3200 MHz
2	Stop Band Attenuation	≥60dB
3	Pass Band Frequency	DC ~ 2430MHz & 3520 ~ 8000 MHz
4	Pass Band Insertion Loss	≤ 2.0 dB
5	Pass Band VSWR	≤ 2.0
6	Average Power	≤ 20W
7	Impedance	50 Ohms
8	Dimensions	157*22*32mm
9	Connectors	SMA-Female
10	Surface Finish	Painted Black
11	Operation Temperature	0°C ~ +50°C
12	Storage Temperature	-55°C ~ +85°C
13	Configuration	As below (Tolerance: ±0.5mm)

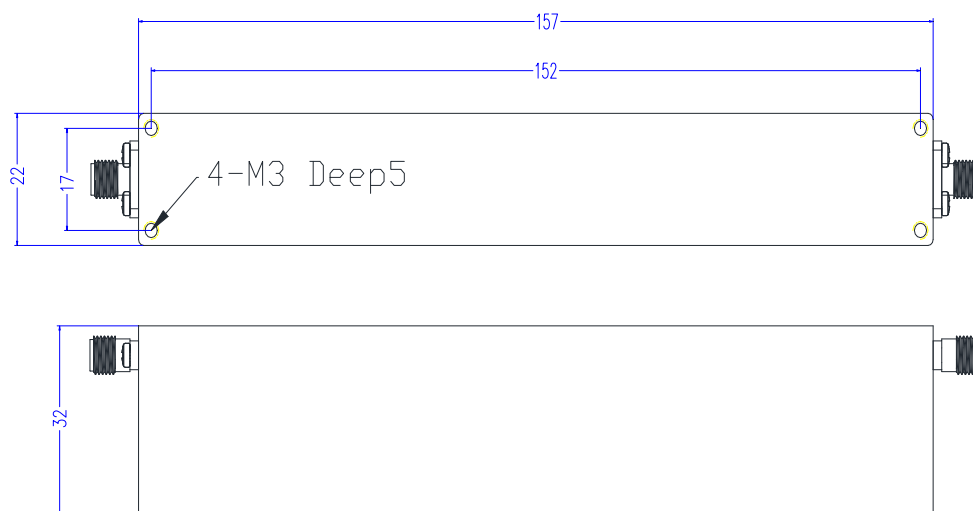

Performance

