


STR-2800-3200M05A

Cavity Band Rejection Filter

Specifications

S/N	Item	Parameters
1	Stop Band	2800 ~ 3200 MHz
2	Stop Band Attenuation	$\geq 40\text{dB}$
3	Pass Band Frequency	DC ~ 2400MHz & 3600 ~ 18000 MHz
4	Pass Band Insertion Loss	$\leq 1.0\text{ dB}$
5	Pass Band VSWR	≤ 2.0
6	Average Power	$\leq 20\text{W}$
7	Impedance	50 Ohms
8	Dimensions	75*25*10mm
9	Connectors	SMA-Female
10	Surface Finish	Painted Black
11	Operation Temperature	0°C ~ +50°C
12	Storage Temperature	-55°C ~ +85°C
13	Configuration	As below (Tolerance: $\pm 0.3\text{mm}$)

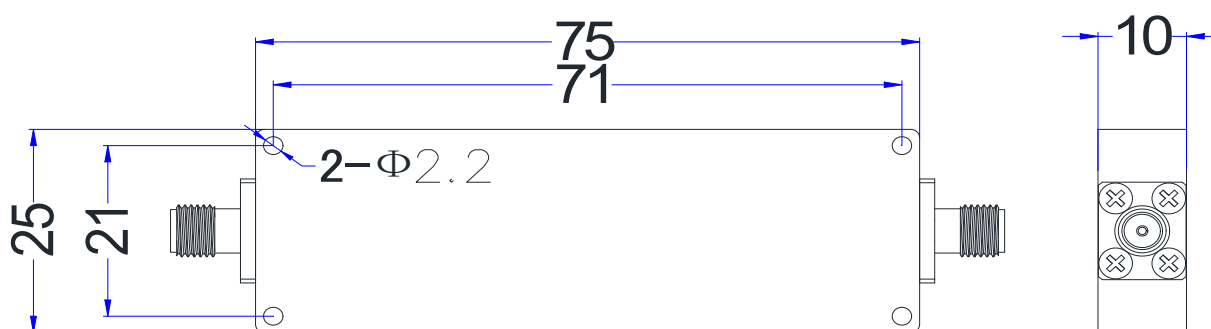

Performance

