


STR-3200-3800M08A

Cavity Band Rejection Filter

Specifications

S/N	Item	Parameters
1	Stop Band	3200 ~ 3800 MHz
2	Stop Band Attenuation	$\geq 60\text{dB}$
3	Pass Band Frequency	DC ~ 2880MHz & 4180 ~ 10000 MHz
4	Pass Band Insertion Loss	$\leq 2.0\text{ dB}$
5	Pass Band VSWR	≤ 2.0
6	Average Power	$\leq 20\text{W}$
7	Impedance	50 Ohms
8	Dimensions	125*22*32mm
9	Connectors	SMA-Female
10	Surface Finish	Painted Black
11	Operation Temperature	0°C ~ +50°C
12	Storage Temperature	-55°C ~ +85°C
13	Configuration	As below (Tolerance: $\pm 0.5\text{mm}$)

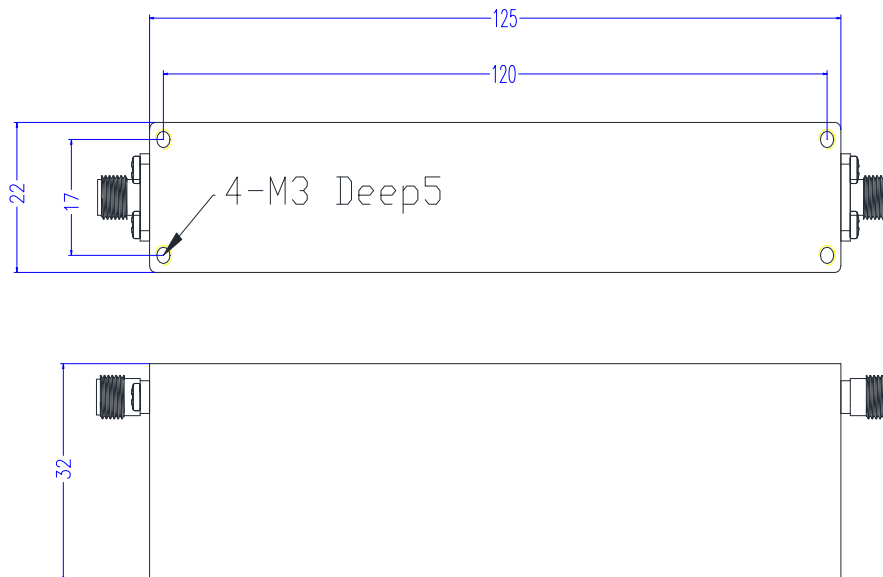

Performance

