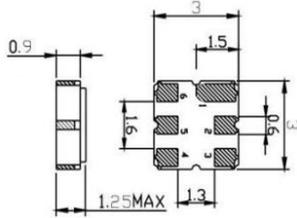


# Specification Sheet

Customer Name	XXXX	CUST P/N	NA
Approval No.	PD	Temwell P/N	STSF-860B18-S3030W
Lot No.		Date	2025.06.24
Description	SAW Filter (BandPass)	Version	A1

**(1) Size Diagram (Unit : MM)**


PinNo.	Description
2	Input
5	Output
1,3,4,6	Ground

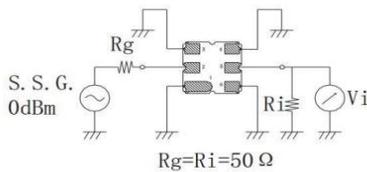
**(2) Electrical Specifications**

Item			Specification		
Parameter	MHz	Unit	Min.	Typical	Max.
Center Frequency	-	MHz	-	860	-
Insertion Loss	860	dB	-	1.4	1.8
Insertion Loss	851-869	dB	-	1.8	2.4
Ripple Deviation	851-869	dB	-	1.0	1.2
Group Delay	851-869	ns	-	30	100
VSWR	851-869	-	-	1.6:1	2.0:1
Attenuation	DC-806	dB	50	55	-
	806-821	dB	50	55	-
	931-955	dB	50	55	-
	955-1060	dB	45	55	-
	1060-2000	dB	35	45	-
	2000-3000	dB	30	40	-
Operation Temperature	-40°C~+85°C	°C	-	-	-
Storage Temperature	-40°C~+85°C	°C	-	-	-
RF Power Dissipation	20	dBm	-	-	-

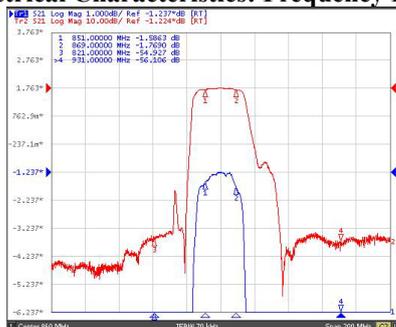
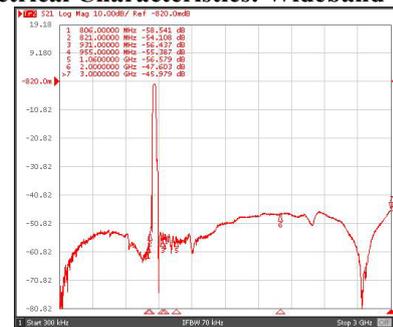
**Remark**

Note 1: Test Temperature: 25°C±2°C

Note 2: Terminating source impedance: 50Ω. Terminating load impedance: 50Ω

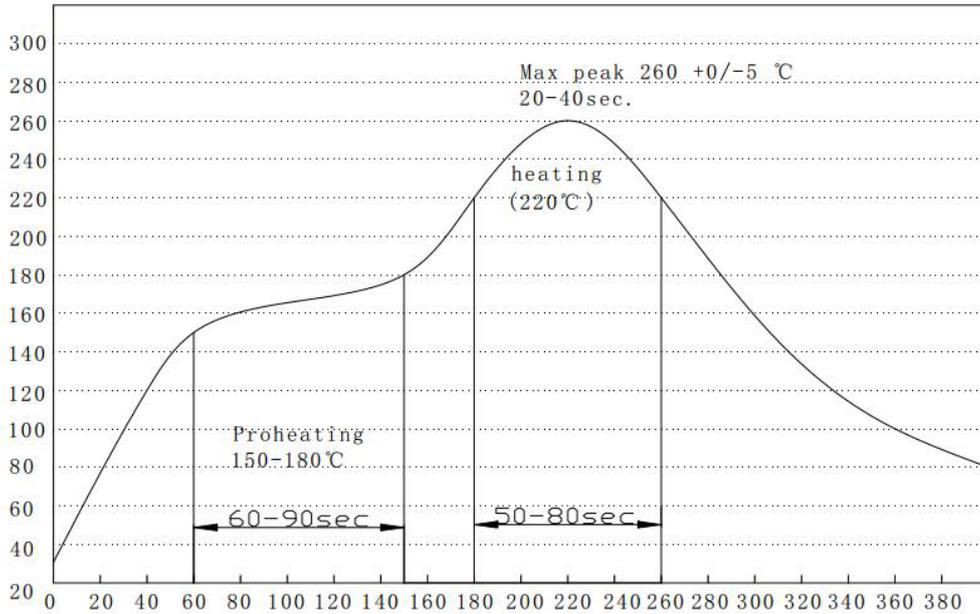
**(3) Test Circuit**


Port	Matching component
Input	R1: 50Ω
Output	R2: 50Ω

**Figure 1 Electrical Characteristics: Frequency Response**

**Figure 2 Electrical Characteristics: Wideband**


Approval	Supervisor	Designer
C. K. Chang	M. Y. Chen	F.L.Lai

### Recommended SMT Solder Profile



### Reliability

No.	Test item	Test condition	
1	Temperature Storage	Temperature: 85°C $\pm$ 2°C , Duration: 250h , Recovery time: 2h $\pm$ 0.5h Temperature: -40°C $\pm$ 3°C , Duration: 250h ,Recovery time: 2h $\pm$ 0.5h	
2	Humidity Test	Conditions: 60°C $\pm$ 2°C ,90~95%RH	Duration:250h
3	Thermal Shock	Heat cycle conditions: TA=-40°C $\pm$ 3°C, TB=85°C $\pm$ 2°C, t1=t2=30min, Switch time: $\leq$ 3min, Cycle time: 100 times, Recovery time: 2h $\pm$ 0.5h.	
4	Vibration Fatigue	Frequency of vibration:10~55Hz Directions: X,Y and Z	Amplitude:1.5mm Duration: 2h
5	Drop Test	Cycle time:10times	Height:1.0m
6	Solder Ability Test	Temperature:245°C $\pm$ 5°C Depth: DIP--2/3, SMD--1/5	Duration:3.0s--5.0s
7	Resistance to Soldering Heat	Thickness of PCB:1mm , Solder condition: 260°C $\pm$ 5°C , Duration:10 $\pm$ 1s Temperature of Soldering Iron: 350°C $\pm$ 10°C, Duration: 3~4s, Recovery time : 2 $\pm$ 0.5h	