
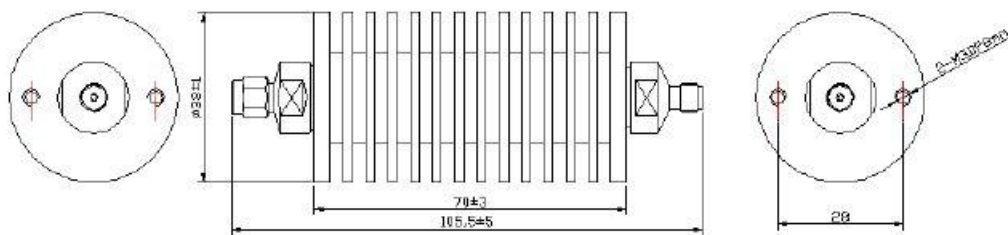


## Attenuator Specifications

Serial	Parameters	Specifications
1	Freq(MHz)	DC-6GHz
2	Attenuation(dB)	1-10    20    30    40
3	Accuracy(dB)	±0.8    ±0.8    ±1.0    ±1.2
4	VSWR	≤1.25
5	Average Power(W)	30W
6	Impedance	50 ohm
7	Connector	SMA Male to Female
8	Color	Black
9	Ambient Temp(deg)	-35~+75C
10	Relative Humidity	5%-95%
11	Dimension	As below (Unit: mm/[inch] ) (Tolerance: ±1[±00.04])

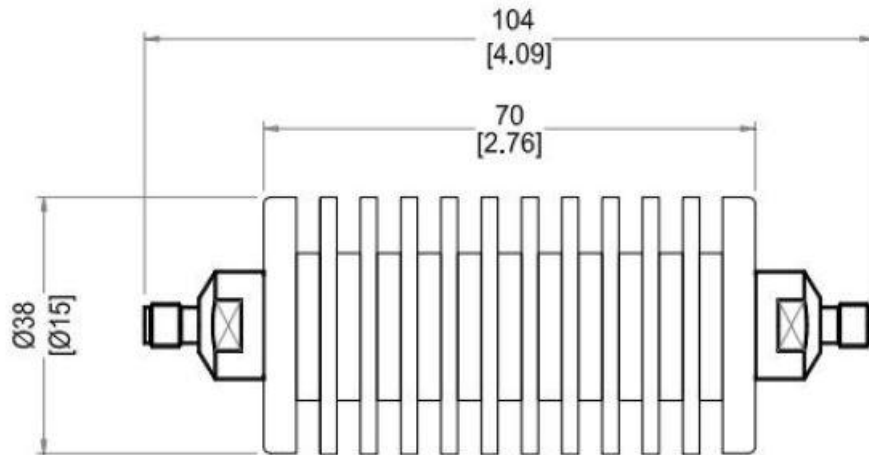

SMA-M-F

# Performance

