


Cavity Band Pass Filter Specifications

Serial	Parameters	
1	Frequency Range	6.0~18GHz
2	Insertion Loss	≤2.5dB
3	VSWR	≤1.8:1 (Type≤1.6:1)
4	Stop Band Attenuation	≥60dB @ DC~5.4GHz ≥60dB @ 19.2~22GHz
5	Impedance	50 ohms
6	Power Handling	≤5W
7	Surface Finish	Guide Oxygen or Black Paint
8	Port Connectors	SMA-Female
9	Net Weight	0.045 KG
10	Configuration	As Below (Size Unit: mm)



Performance

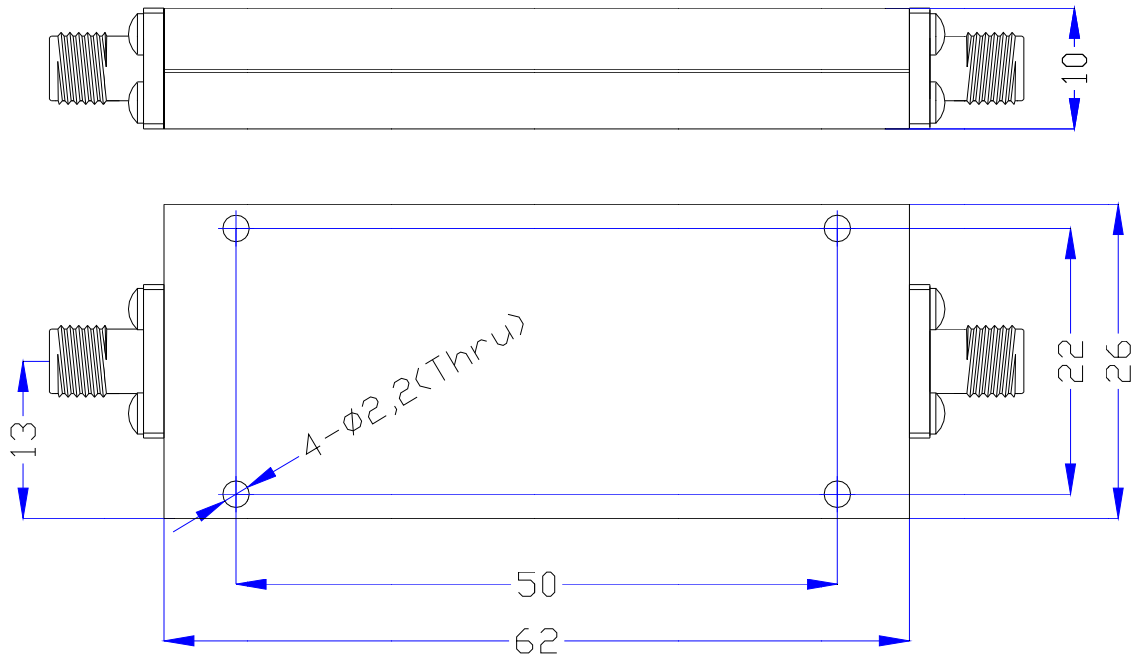