


Preliminary Specifications:

- ◆ Frequency: 960-1215MHz
- ◆ Attenuation Range: 0-100dB 1dB step
- ◆ Attenuation Step: (1, 2, 4, 8, 16, 20, 20, 30) dB
- ◆ VSWR: ≤ 1.40 Max
- ◆ Insertion Range: ≤ 1.7 dB
- ◆ Attenuation Accuracy: ± 3.0 dB
- ◆ Power Rating: 5W
- ◆ Connector: N female to N female
- ◆ Temperature Range: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆ Dimension: $126.5 \times 30 \times 20$

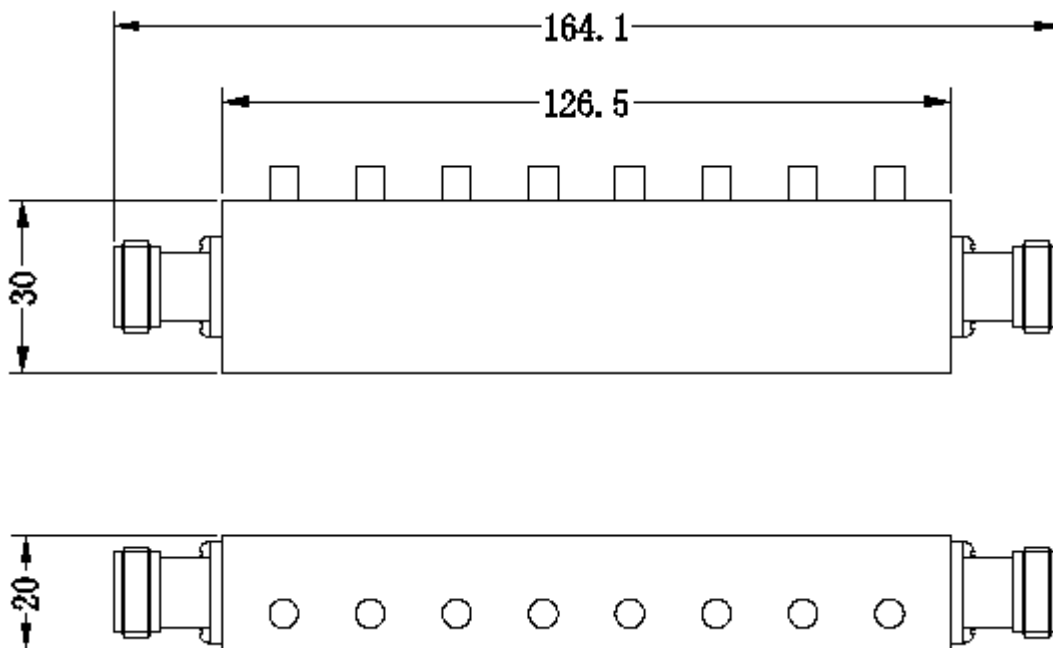

dimension:mm

Dimension Tolerance $\pm 2\%$