8F-1, No.51, Sec.1, MinSheng E.Rd• Taipei 104•Taiwan (R.O.C.)
Tel:886-2-25652004•**Fax:**886-2-2551-5250•**E-mail:** sales@temstron.com

ST-WH07-25GK

Cavity Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	25.875GHz
2	Pass Band Bandwidth	3.25GHz (24.25～27.5GHz)
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Return Loss	≥15dB
5	Stop Band Attenuation	≥30dB @ 22.75GHz ≥30dB @ 29GHz
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	2.92mm(K)-Female
9	Operating Temperature	-30℃～+70℃
10	Surface Finish	Black Paint
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

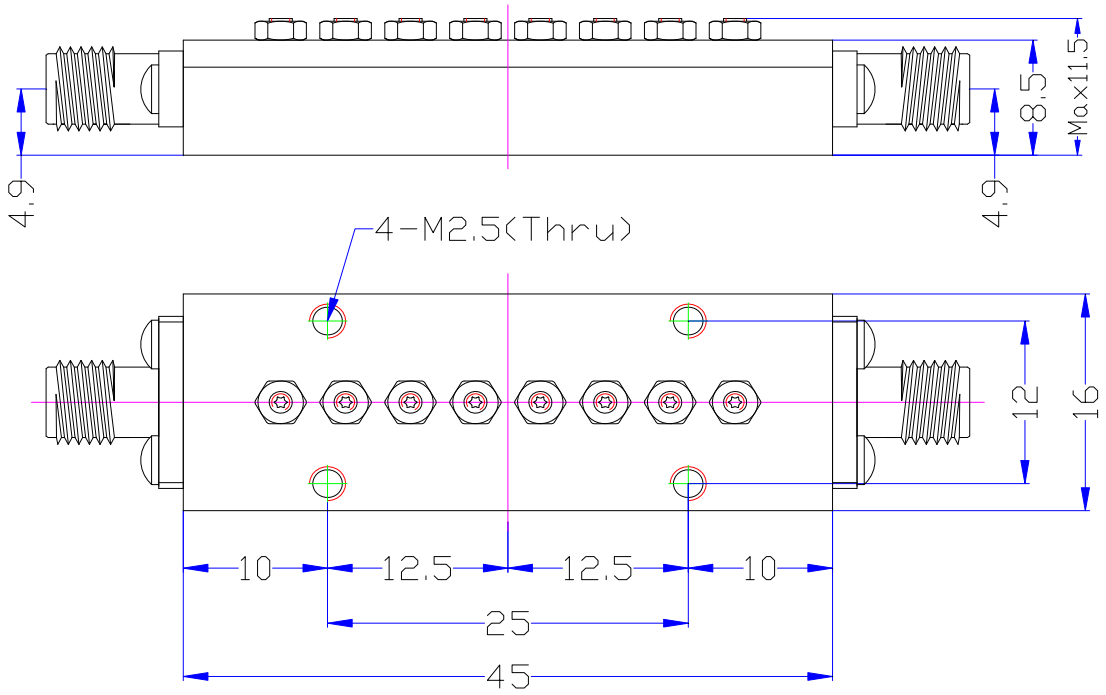

8F-1, No.51, Sec.1, MinSheng E.Rd• Taipei 104•Taiwan (R.O.C.)

Tel: 886-2-2565-2500 • **Fax:** 886-2-2551-5250 • **E-mail:** sales@temstron.com
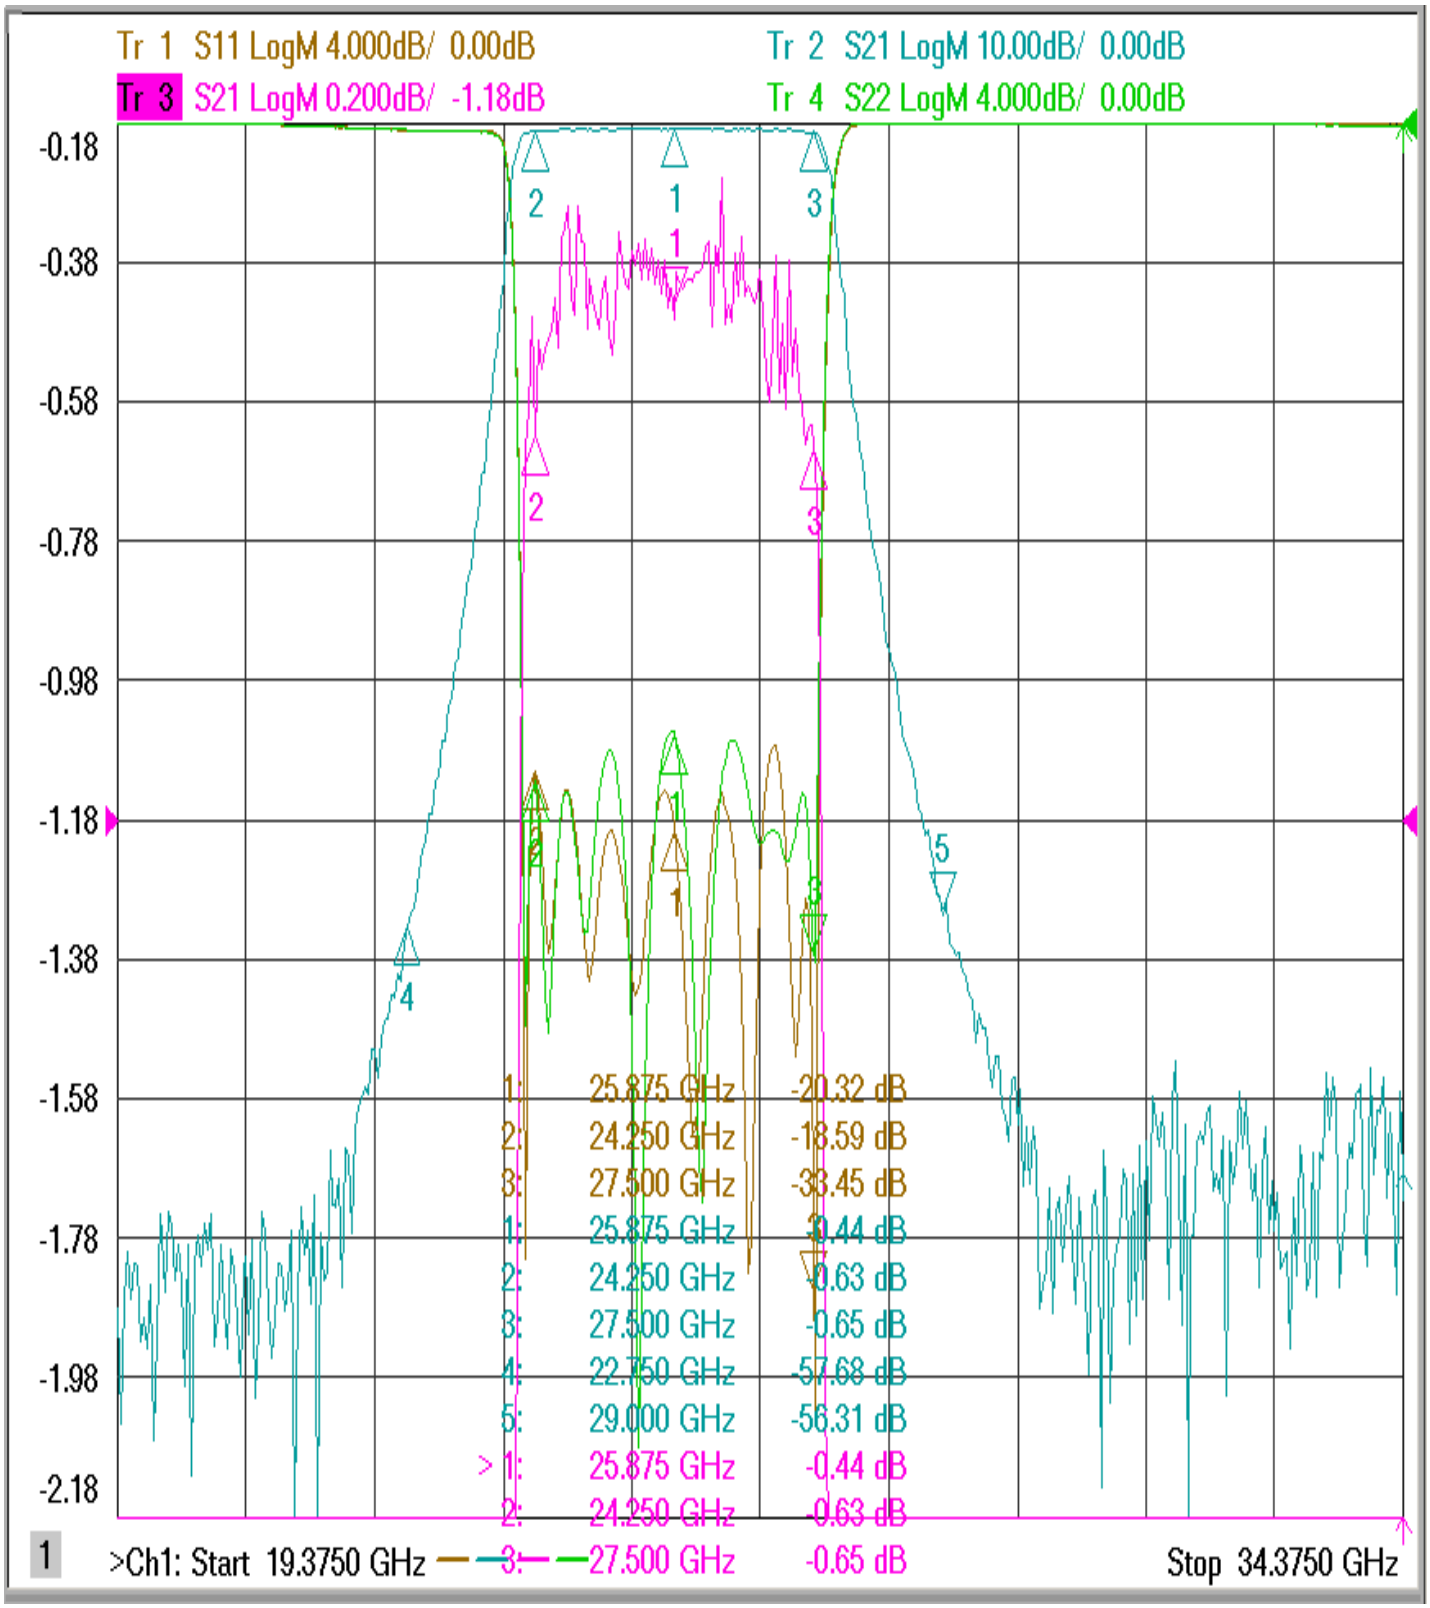
Performance