

5.7 to 5.9GHz – Coaxial Circulator


Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
TSCC1522A57T59SF	5.7 ~ 5.9	0.3	23	1.2	60	60	SMA-F	-40 ~ +85

Mechanical Drawing

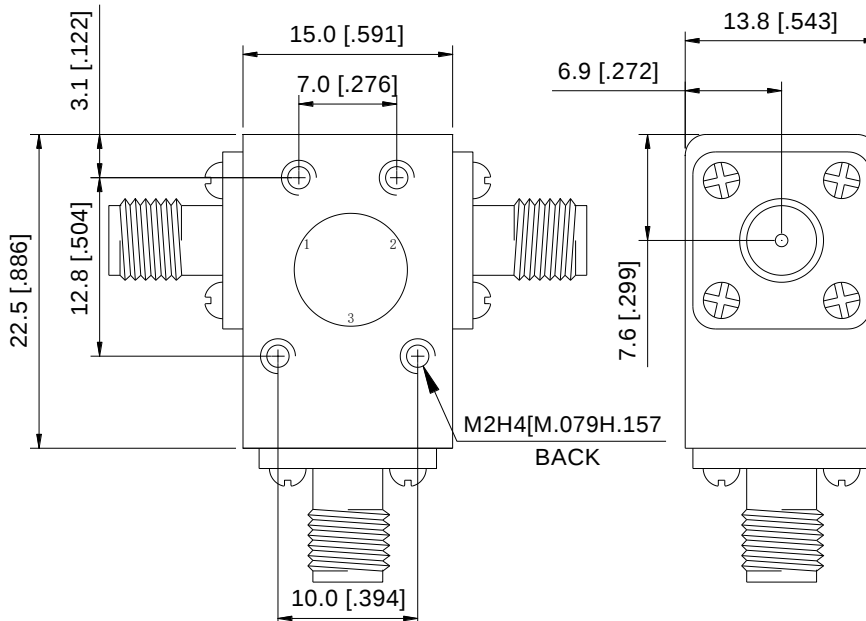

Unit: mm/ inch, General part tolerance is $\pm 0.2\text{mm}$ unless otherwise stated.