


ST-WB08-9000S

Interdigital Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	9000MHz
2	Pass Band Frequency	8000~10000MHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band VSWR	≤1.5:1
5	Stop Band Attenuation	≥60dB @ 0~7000MHz ≥60dB @ 11000~18000MHz
6	Impedance	50 ohms
7	Power Handling	≤2W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-30°C ~ +70°C
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

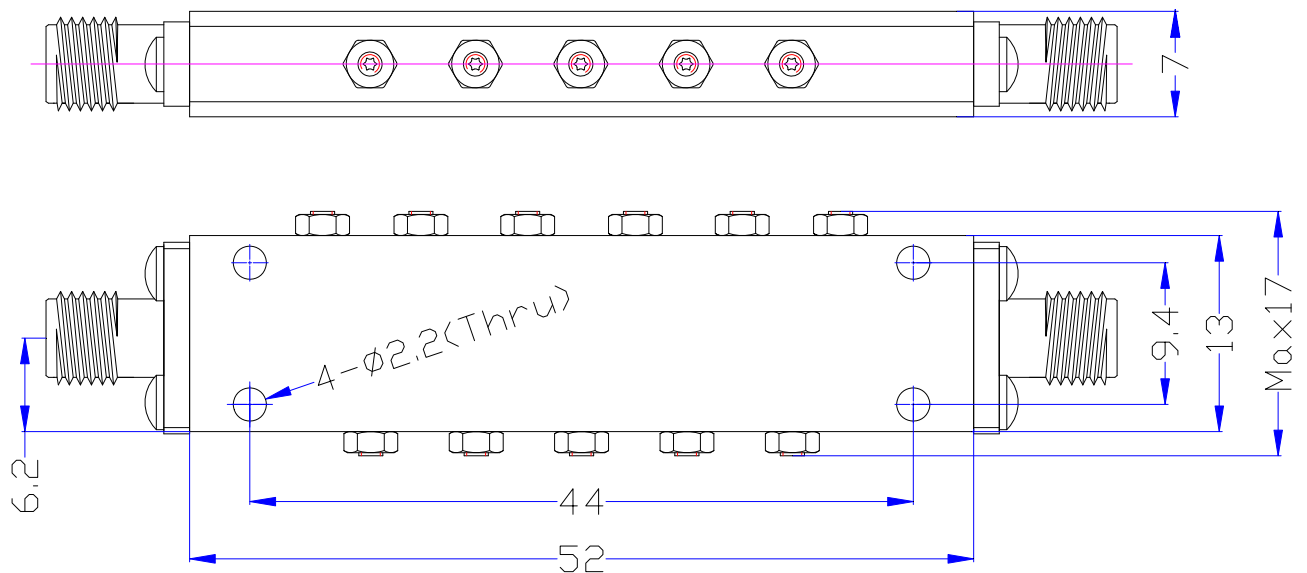

Performance

