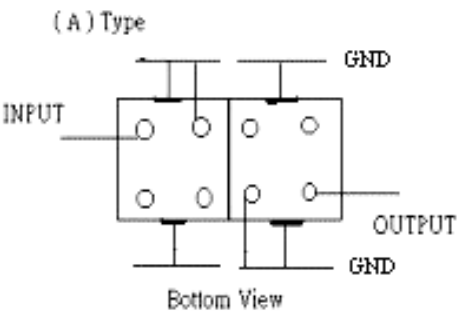
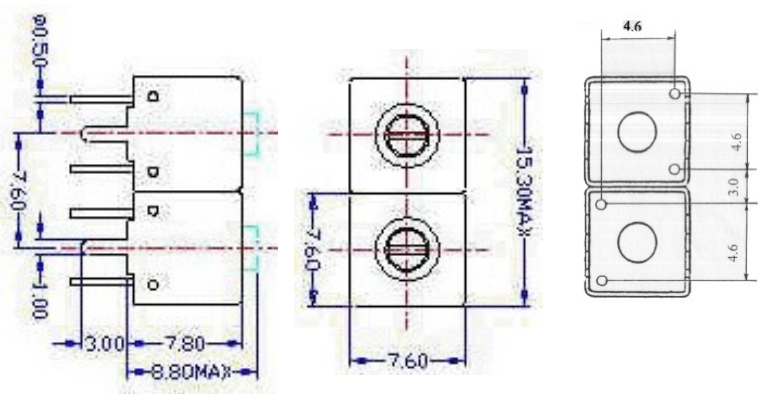


VHF UHF Helical Filter Specification Sheet

Customer Name		Temwell's Part No.	TDS2151A-815M
Approval No. /dated	20110021DC	Acceptable Specify Fo. Range	801~830MHz
Work Instruction No.	20110021DC	Date	2001.10.15

<p>(1) Pin Position</p>  <p>(A) Type Bottom View</p>	<p>(2) Size Diagram</p> 
---	--

(3) Electric Character

Item	Specify	Performance
Center Freq.(Fo) +/- 0.5 %	815 MHz	815 MHz
Tunable Range	815±5 MHz	815±5 MHz
Insertion Loss	Typ. 2.0 dB	1.1 dB
-3 dB Bandwidth	Typ. 60 MHz	64 MHz
Sensitivity (Attenuation)	Fo - 100 MHz	Typ. 19 dBc
	Fo + 100 MHz	Typ. 13 dBc
	Fo - ()MHz	Typ. dBc
	Fo +()MHz	Typ. dBc
Return Loss	Min. 12 dB	21 dB
Ripple	< 1 dB	dB
Impedance	In / Out : 50 Ω	In / Out : 50 Ω
(4) Torque for Tuning Screw	> 100gf • cm	

(5) Temperature Condition:

Operating Temperature	0°C ~ +60°C
Storage Temperature	-20°C ~ +70°C

(6) Input Power

	> 1Watt		
Approval	Supervisor	Designer	Aperture size
C.Y.Chang	C.S.Chang	C.S.Chang	7S2S(4*5.2) 7S046LB6


TEMWELL CORPORATION

Performance-TDS2151A-815M

20110021DC

▷1:S11 Refl Port1 Log Mag 5.0 dB/ Ref 0.00 dB C

▶2:S21 Fwd Trans Log Mag 10.0 dB/ Ref 0.00 dB C

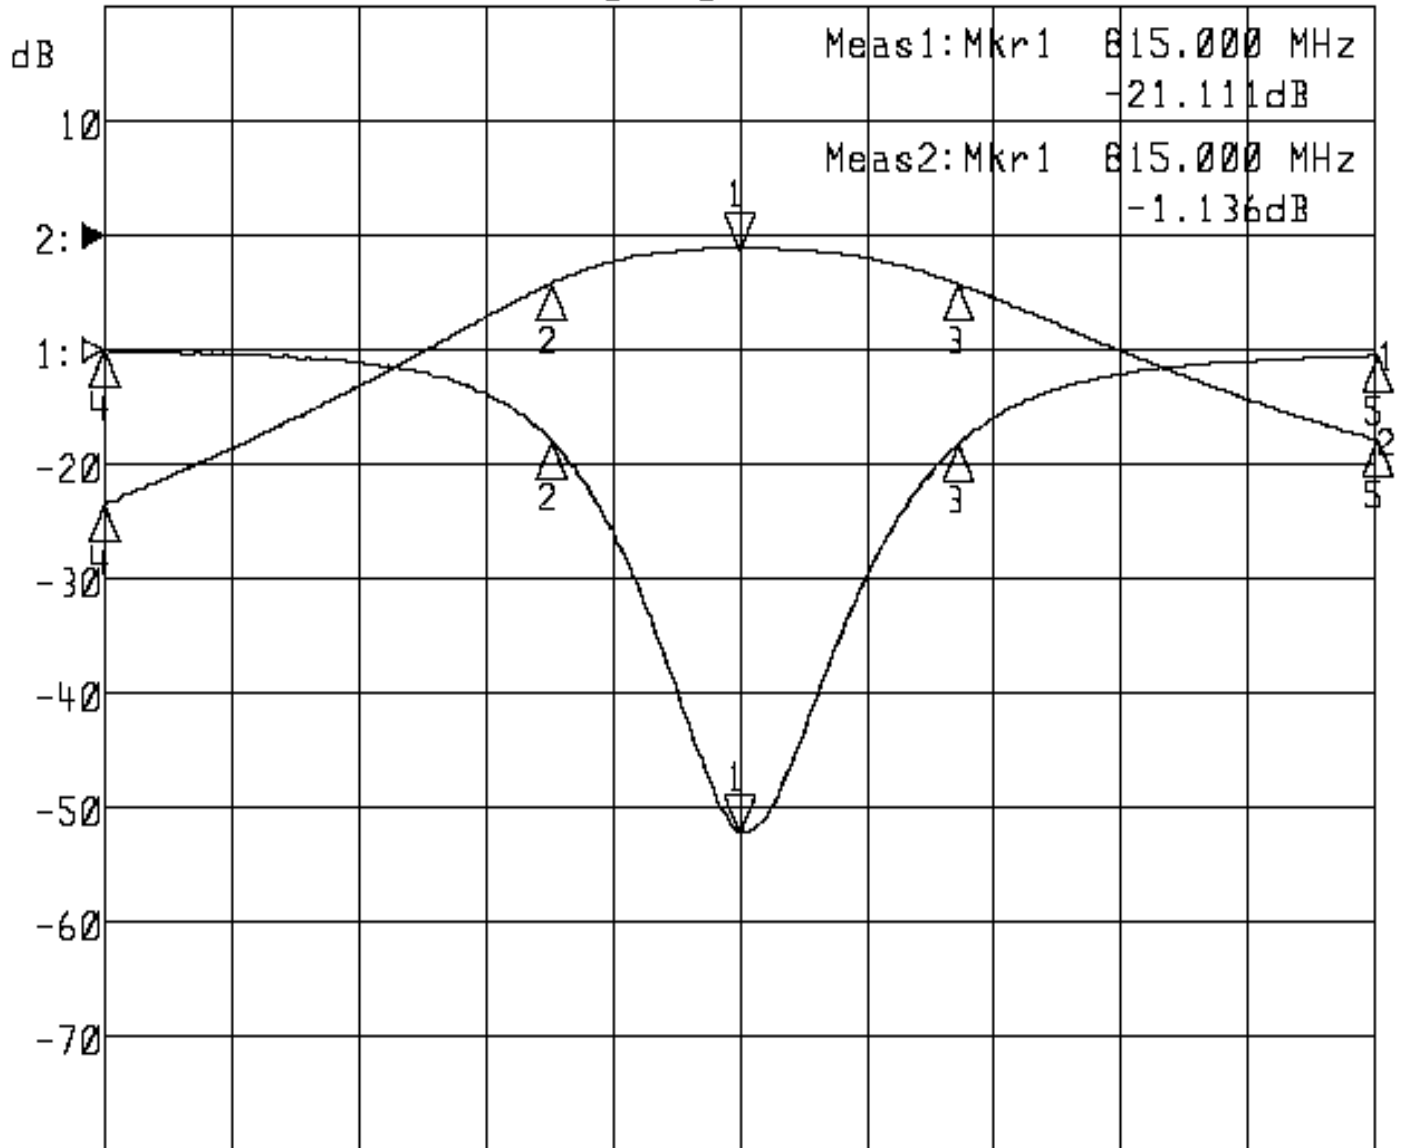

Center 815.000 MHz

Span 200.000 MHz

1:Mkr (MHz)	dB	2:Mkr (MHz)	dB
1> 815.0000	-21.111	1> 815.0000	-1.136
2: 785.6000	-4.021	2: 785.6000	-4.144
3: 849.2667	-4.156	3: 849.2667	-4.167
4: 715.0000	-0.053	4: 715.0000	-23.478
5: 915.0000	-0.218	5: 915.0000	-17.771