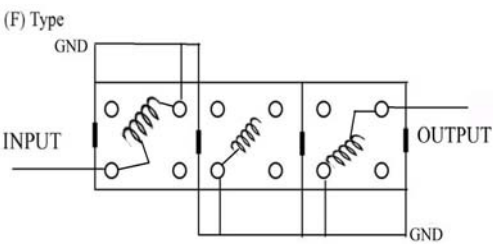
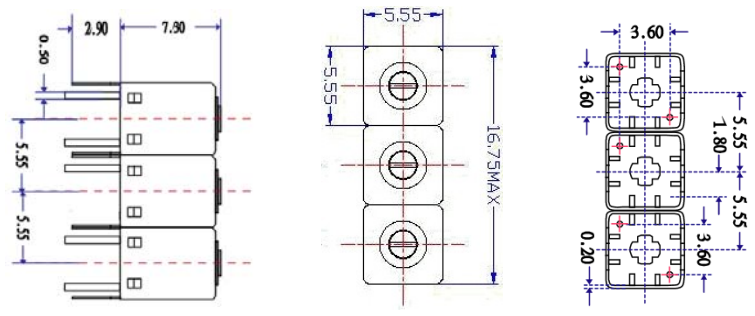


VHF UHF Helical Filter Specification Sheet

Customer Name		Temwell's Part No.	TTR3661F-580M
Approval No. /dated	201505084CD	Temwell's Print Name	3661F 580M
Work Instruction No.	201505084CD	Date	Oct.01.2015

<p>(1) Pin Position</p>  <p>(F) Type GND INPUT OUTPUT GND</p> <p>(Bottom View)</p>	<p>(2) Size Diagram</p> 
---	--

(3) Electric Characteristic

Item	Specify	Performance	
Center Freq.(Fo) +/- 0.5 %	580 MHz	580 MHz	
Insertion Loss	Typ. 3.5 dB	2.38 dB	
-3 dB Bandwidth	Typ. 21 MHz	27.4 MHz	
Sensitivity (Attenuation)	Fo - 50 MHz	Typ. 31 dBc	34 dBc
	Fo + 50 MHz	Typ. 28 dBc	33 dBc
	Fo - ()MHz	Typ. dBc	dBc
	Fo + ()MHz	Typ. dBc	dBc
Return Loss	Min. 12 dB	23.7 dB	
Ripple	< 1 dB	dB	
Impedance	In / Out : 50 Ω	In / Out : 50 Ω	


(4) Torque for Tuning Screw > 60gf · cm

(5) Temperature Condition:

Operating Temperature	0°C ~ +60°C
Storage Temperature	-20°C ~ +70°C

(6) Input Power > 0.5Watt

(7) Measuring Circuit: ※Easy to match Impedance S11/S22 50Ω/ by parallel with about(- -).

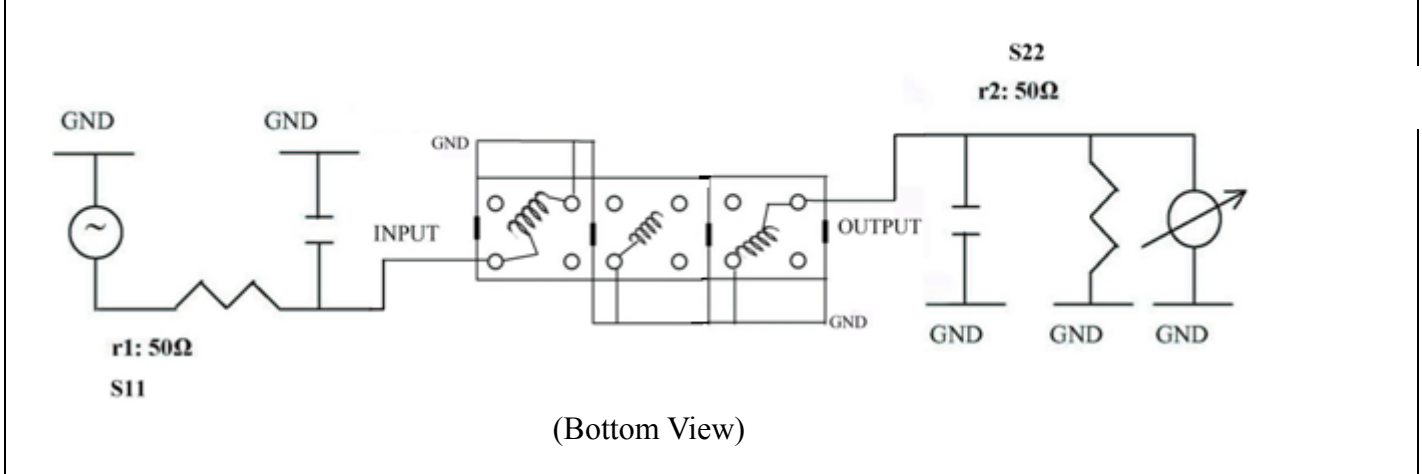

Approval	Supervisor	Designer	Aperture size
C.Y.Chang	C.K.Chang	C.S.Chang	5R3S(3.8*4.2)(5.25) 5H024RB3

TEMWELL CORPORATION

Performance-TTR3661F-580M

201505084CD

Tr1 511 Log Mag 5.000dB/ Ref 0.000dB [F2]
Tr2 521 Log Mag 10.00dB/ Ref 0.000dB [F2]

