


ST-WF15-26GK

Comb Band Pass Filter

Specifications

Serial	Parameters	
1	Center Frequency (F0)	26.875GHz
2	Pass Band Bandwidth	5.25GHz (24.25~29.5GHz)
3	Pass Band Insertion Loss	$\leq 1.0\text{dB}$
4	Pass Band Return Loss	$\geq 14\text{dB}$
5	Stop Band Attenuation	$\geq 30\text{dB @ } 22.75\text{GHz}$ $\geq 30\text{dB @ } 31\text{GHz}$
6	Impedance	50 ohms
7	Power Handling	$\leq 10\text{W}$
8	Connectors	2.92mm(K)-Female
9	Operating Temperature	$-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$
10	Surface Finish	Black Paint
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

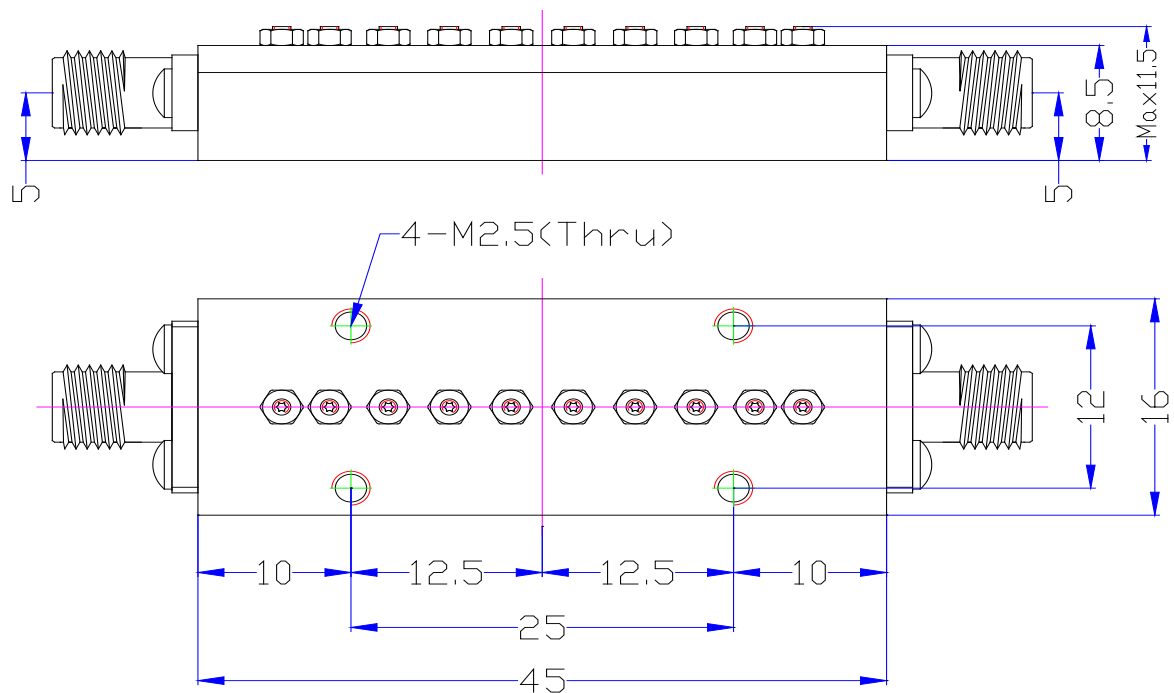

Performance

